

# WING 60w

## TECHNICAL SPECIFICATIONS




SVL Lighting



ROHS CE e IP66


- Elegant appearance Post top with side mount option.
- 60 watt
- IP66
- Beam Angle 55° x 145° (60°/75° x 150° optional)
- Integrated Die-casting aluminum body.
- Streamlined housing to avoid dust accumulation and rain-washing convenience to ensure better heat dissipation.
- PC lens, light transmittance >90%, Flammability rating: UL94-V0.
- Optional light sensor plug-in for extensive energy saving.
- Ideal for Park, Garden, Courtyard, Residential Streets & Rural Roads.

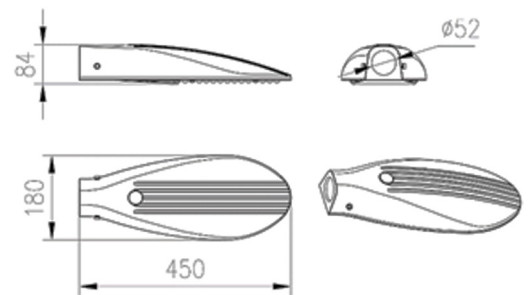

CODE	WATTS	CRI	COLOUR TEMP	LUMENS
WIN603SG	60w	Ra75(Ra85 optional)	3000K	7,000lm
WIN604SG	60w	Ra75 (Ra85 optional)	4000K	7,200lm
WIN605SG	60w	Ra75 (Ra85 optional)	5000K	7,200lm

\*Silver grey (SG), dark grey, black, white optional

### LIGHT DISTRIBUTION

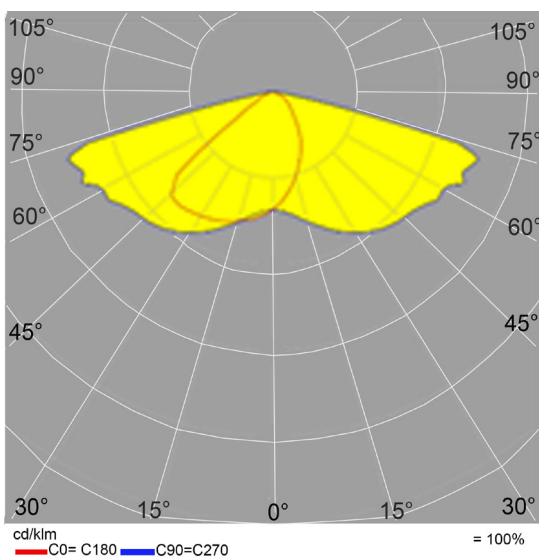

<b>POWER CONSUMPTION</b>	60W ±5W
<b>IP RATING</b>	IP 66
<b>LUMINOUS FLUX</b>	>7800 lm
<b>EFFICACY</b>	>130 lm/W
<b>BEAM ANGLE</b>	55° x 145° (60°/75° x 150° optional)
<b>COLOUR TEMPERATURE</b>	3K, 4K & 5K
<b>CRI</b>	>70
<b>MOUNTING ARRANGEMENT</b>	Post top & Side mount
<b>DIMENSIONS</b>	450mm x 180mm x 84mm
<b>POWER FACTOR</b>	≥0.90
<b>POWER SUPPLY</b>	220-240V AC 50-60Hz
<b>LIFE SPAN</b>	100,000 hrs (TM-21L70)

\* IES files are available on request