NOVA B

TECHNICAL SPECIFICATIONS

SVL Lighting



RoHS CE IP20

- Recessed fixed downlight
- Deep conical housing provides low glare
- Efficient Thermal management guarantees long lifespan
- Smooth reflector; highly reflective aluminised finish for zero iridescence
- Recessed polycarbonate diffuser gives a symmetrical wide beam distribution
- Ideal for foyers, hotels, corridors, function rooms, retail stores and general lighting

Order Code	Wattage	Beam Angle	Colour Temp	Trim colour
NOVA143W	14W	60D	3000K	W
NOVA204W	20W	60D	4000K	W
NOVA273B	27W	60D	3000K	B
NOVA344B	34W	60D	4000K	B

* Please contact our sales team for specific requirements and order code

Dimensions:	D:190mm x H:122mm
Cut out:	165mm
Power Consumption:	14W,20W,27W,34W
Finish Colour:	White
CRI:	83
Colour Temp:	3000K/4000K
Power Factor:	>0.95
Lumens	14w @ 1200lm 20w @ 1800lm 27w @ 2400lm 34w @ 3000lm
Beam Angle:	60°
Dimmable:	Leading & Trailing Edge, DALI DSI & TouchDim

** IES Files are available on request*
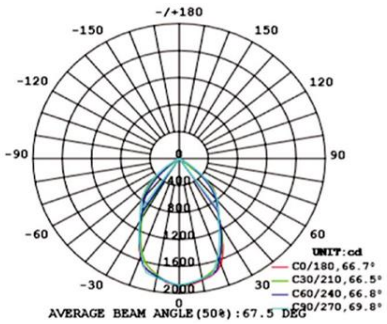
Luminous Intensity Distribution Diagram