




SQIN B

TECHNICAL SPECIFICATIONS



SVL Lighting



IP20


- Twin square downlight solution to replace CFL and metal halide lighting.
- CITIZEN brand COB LED used to increase the efficiency of the light output. The choice of 1800lm and 3000lm heads are available according to your requirements.
- Ideal for applications in Hospitality, Commercial and Retail
- Available with a surface mounted case



Code	Wattage	Colour Temp	Trim Colours	Lumens
SQINB263W	2x26W	3000K	W	2x2500lm
SQINB264S	2x26W	4000K	S	2x2500lm
SQINB323W	2x32W	3000K	W	2x3000lm
SQINB324S	2x32W	4000K	W	2x3000lm

Trim Colours W S

Luminous Intensity Distribution Diagram

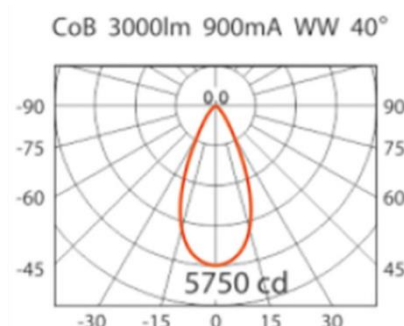

Depth:	206mm
Dimensions:	315mm x 175mm
Cut out:	295mm x 155mm
Colour Rendering Index (CRI):	83
Colour Temp (CCT):	3000K 4000K
Finish Colour:	White Silver
Beam Angle:	40Deg
Wattages:	2 x 26w 2 x 32w
Power factor:	> 0.95
Lumen:	2 x 26W @ 2500lm 2 x 32W @ 3000lm
Dimmable:	Leading & Trailing Edge, DALI
Lifespan:	Up to 50,000 hrs (L70/B10)

* IES Files are available on request