


# PEPPER A



SVL Lighting

## TECHNICAL SPECIFICATIONS

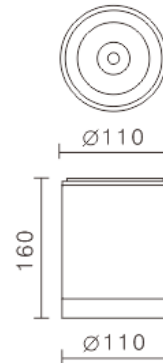

- Surface-mount outdoor ceiling light
- IP65 mechanism and protection glass on the front
- Optional beam angles
- 30° cut-off angle to avoid discomfort glare
- Built-in driver, easy to install
- More flexibility of changing different beam angle reflectors to meet different spot and flood application
- Lumen availability: 3400lm, 2100lm

**Dimensions:** D 110mm x H 160mm

**Wattage:** 18w/25.5w

**Finish Colour:** Black, Silver

**CRI:** 95

**Colour Temp:** 3000K, 4000K

**Power Factor:** >0.9

**Lumens** 18w @ 2100lm  
25.5w @ 2500lm

**Beam Angle:** 40°,70°

**Dimmable:** NO

**Life span:** 50,000 Hrs

Order Code	Wattage	Beam Angle	Colour Temp	Trim colour
PEPA2533B	25.5W	40D	3000K	B
PEPA2545B	25.5W	70D	4000K	B

\* Please contact our sales team for specific requirements and order code

\* IES Files are available on request

## Luminous Intensity Distribution Diagram

