



LINO C Recessed



SVL Lighting

TECHNICAL SPECIFICATIONS

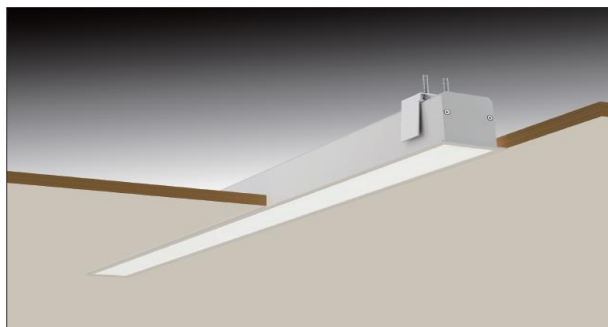

OSRAM

IP40

- Architecturally designed LED linear profile (68x80mm).
- Special opal diffuser and internal reflector for efficient light distribution and uniformity
- High efficiency / quality interconnectable Osram LED Boards used (CRI >90)
- All modules can stand alone or Interconnect for multiple run lengths
- The interlocking latch / pin system and continuous diffuser, give a seamless finish
- Screwless interlocking end caps
- Applications: hospitality, commercial, retail and residential

Model:	Recessed LED Linear
Dimensions:	68mm (W) x 80mm (H)
Power Consumption:	36w/linear mtr
Lumens	122lm/W
Colour Temp:	3000K/4000K
Finish Colour:	White/Black/Silver Custom Powder Coat
CRI:	>90
Power Factor:	>0.95
Accessories:	EMERGENCY Kit, Sensors, Joints
Dimmable:	Trailing edge, 1-10V, DALI Tuneable White

* IES Files are available on request

Order Code	Wattage	Length	Colour Temp	Trim color
LINC363W	36W	1160mm	3000K	W
LINC724B	72W	2254mm	4000K	B

- Please contact our sales team for specific requirements and all other item codes

L-module



T-module



X-module

