


SLIM-SQ

TECHNICAL SPECIFICATIONS



SVL Lighting



IP20


- Efficient heat dissipation
- High brightness SMD LEDs
- Safe and durable, can be cyclic utilization
- No hazard for lead or Mercury enter the environment
- Constant current driver
- IPART approved
- Suitable for T-Bar grid system and can be recessed, surface mounted or suspended
- Tri-Color 3000K-5000K available
- Ideal for all types of Hospitality, Commercial, Education, Office and Retail application



Order Code	Wattage	Beam Angle	Colour Temp	Trim colour
PAN403WSQ	40W	120D	3000K	W
PAN404WSQ	40W	120D	4000K	W

Dimensions:	595mm x 595mm
Colour Rendering	>80
Colour Temp	3000k,4000k
Finish colour	White
Beam Angle	120°
Power Factor:	>0.90
Power Consumption	22w,36w,40w
Lumens	100lm-140lm/W
Dimmable	No
Lifespan	50,000 hrs

- Please contact our sales team for specific requirements and order code

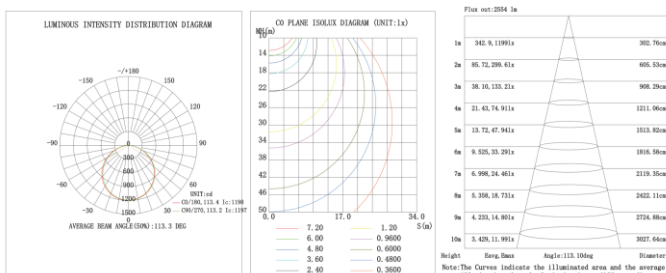

* IES Files are available on request