

# SIGO B, C

## TECHNICAL SPECIFICATIONS



SVL Lighting



- Recessed adjustable wall wash downlight
- 355° rotating and 60° tilting
- Smooth positive retention and rotation mechanism
- High performance reflector providing low glare
- Die Cast aluminium alloy body
- Clear tempered glass providing IP40 LED protection
- Leading & trailing edge driver
- Ideal for Shopping Centres, Retail Outlets

**Dimensions:** D:162mm / D:188mm

**Cut out:** 150mm / 175mm

**Power Consumption:** 19W,29W,36W

**Finish Colour:** White

**CRI:** 85

**Colour Temp:** 3000K/4000K

**Power Factor:** >0.9



**Lumens** 29W @ 2800lm  
36W @ 3400lm

**Beam Angle:** 40°. 70°

**Dimmable:** Leading and trailing edge/DALI

Order Code	Wattage	Diameter	Cut Out	Lumens
SIGB293W	29W	162mm	150mm	2800lm
SIGC363W	36W	188mm	175mm	3400lm

### Functionality Diagram

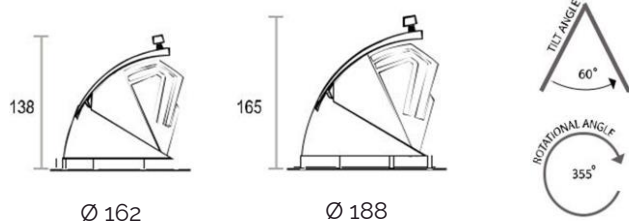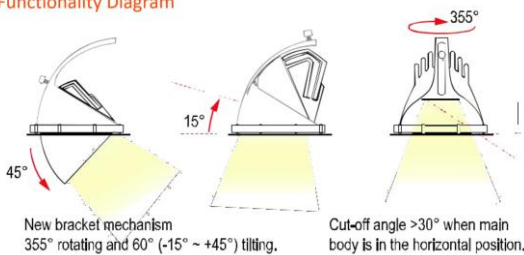

\* IES Files are available on request

