


IK10 **IP65**

- Suspended High Bay
- Offers both direct and indirect illumination while diffusing the light source
- Adopts cold-forging aluminium alloy heat sink for excellent heat dissipation
- Ultra high efficacy up to 160lm/W
- The best energy saving choice for high ceiling lighting
- 5 years Warranty

Depth:	163mm
Dimensions:	∅ 280mm
Cut out:	Suspended
Colour Rendering (CRI):	75 Ra
Colour Temp (CCT):	4500K – 5500K
Finish Colour:	White, Black
Beam Angle:	120°
Power Consumption:	155W±5W
Power factor:	>0.95
Lumen of Chip & Luminaire:	24,000lm
Operating Temp	-40°C -- +50°C
Lifespan:	>100,000 Hrs

Order Code	Wattage	Beam Angle	Colour Temp	Trim colour
TEL1504B	150W	120d	4500K	B

Intelligent Control Extend

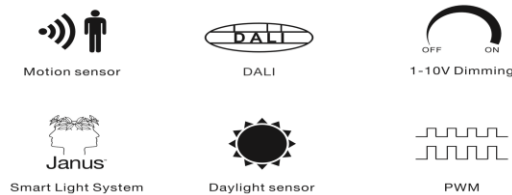

Accessories Options:



* IES Files are available on request

