


Description:

- LUMI -F is designed to improve the concept of the standard downlight, with high power OSRAM LED and baffle design, providing comfort, circular and anti glare distribution.
- Architecturally designed LED linear recessed directional downlight
- OSRAM LED chip
- Recessed ceiling mounted
- Segment option: 5, 10 or 15 lamps
- Powder coated seamless finish
- Applications: hospitality, commercial, retail, residential and gallery spaces

Order Code	Wattage	Beam Angle	Colour Temp	Trim colour
LUMF1132W	11W	15°	3000K	W
LUMF1133B	11W	30°	3000K	B

- Please contact our sales team for specific requirements and order code

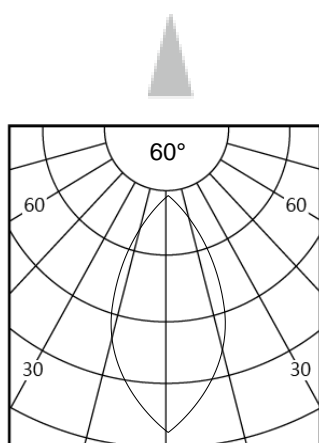

Dimensions: 153mm x 47mm x 61Hmm

Model: Fixed recessed downlight

Cut out: 135mm x 39mm

Power Consumption: 11w 2.2w x 5

Supply Voltage: 700mA Max 16w

Colour Temp: 3000K

Body finish: White/Black
Baffle: Black/White/Piano Black

CRI: >90

Beam angles: 15°, 30°, 40°

Lumens: 1000lm

Dimmable: DALI, TRIAC, 1-10V

